


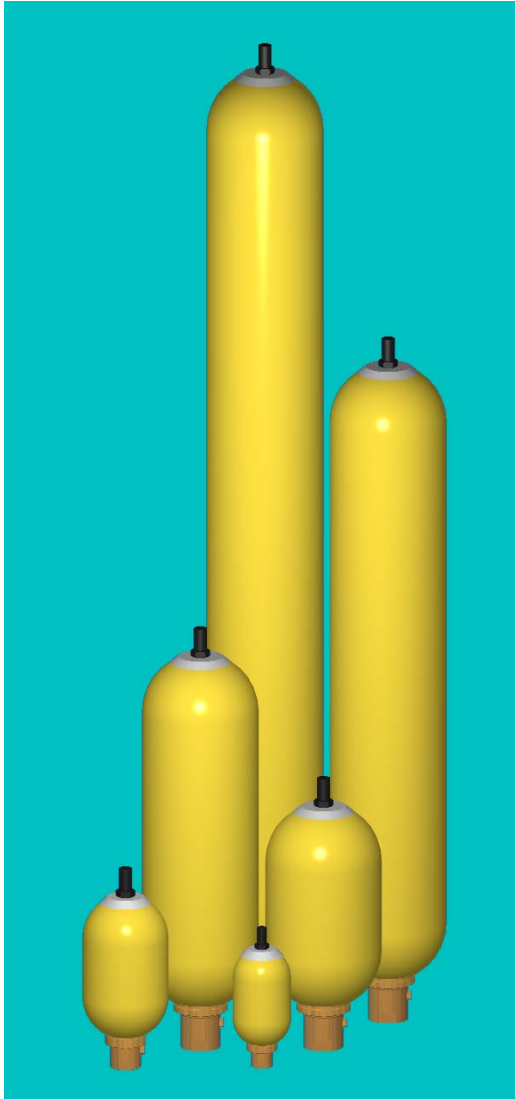

Schrupp Hydraulic Accumulators



TABLE OF CONTENTS		
DESCRIPTION	SPECIFICATION NO.	PAGE NO.
Standard Bladder Accumulators, 3000 psi	ABA-001	4
Standard Bladder Accumulators, 5000 psi	ABA-002	5
Top Repairable Bladder Accumulators, 3000 psi	ABA-003	6
Top Repairable Bladder Accumulators, 5000 psi	ABA-004	7
Transfer Barrier Bladder Accumulators, 3000 psi	ABA-001---T	8
Bladder Accumulator Gas Bottles, 3000 psi	ABA-001---G	9
Bladder Accumulator Accessories		10
Bladder Accumulator Mounting Brackets		11
Replacement Bladders & Optional Fluid Ports		12
Bladder Accumulators Ordering Information		13
Bladder Accumulator Maintenance Instructions		14-16
Bladder Accumulator, Top Repairable, Welded Construction	ADA-HTR	17
Diaphragm Accumulator Welded Construction	ADA-H	18
Diaphragm Accumulator Threaded Construction	ADA-HST	19
Diaphragm Accumulator, PVC or Polypropylene Body	ADA-HSTPVC ADA-HSTP	20
Diaphragm Accumulator, Stainless Steel Body	ADA-HSTX	21
Diaphragm Accumulator, Charging Assembly & Gas Valve	SCA-160 SCA-162	22
Bladder Type Pulsation Dampeners	HBX	23
Bladder Type Pulsation Dampeners, Top Repairable	HTRX BXT	24
Accumulator Special Executions		25

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com

BLADDER ACCUMULATORS



Specification No. ABA-001

ASME VIII Range 3000 psi

TECHNICAL

Maximum Working Pressure: 3000 psi @ 200°F

Minimum Test Pressure: 4500 psi

Nominal Capacities: 1 quart, 1.0, 2.5, 5.0, 10.0 & 15.0 gal.

DESIGN

Shell: Designed and Manufactured in accordance with ASME Code Rules, Section VIII, Division 1


Material - Chrome Molybdenum Steel, SA372 Grade E, Class 70
(Meets 4 : 1 Safety Requirements)

Separator Bag: Totally enclosed molded synthetic rubber bag in a range of materials. Integral steel stem fitted with gas valve assembly, sealing cap, O-ring, locknut and protective cap.

Fluid Port Assembly: Poppet type assembly manufactured in AISI 4130 carbon steel specifications, complete with molded retaining rings, locking ring and bleed plug.

Inspection: Shell certified throughout manufacture with witness testing by independent authorities, ASME approval and "U" code stamped.

Finish: One coat epoxy based primer.
Special finishes available.

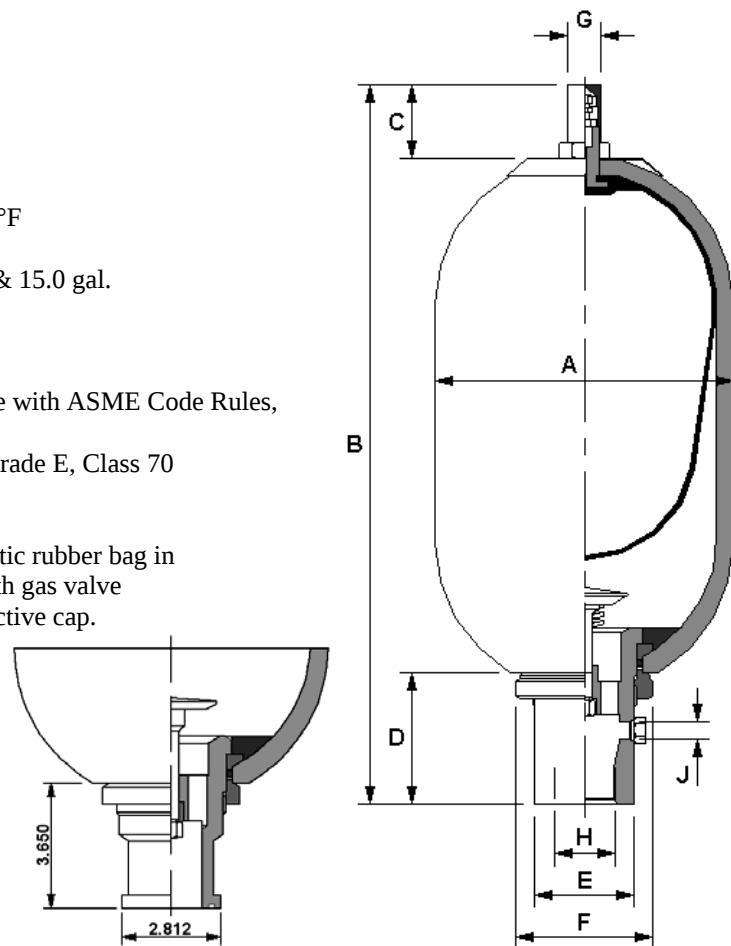

2.5 – 15 Gallon Split Flange
Fluid Port Option

Nominal Capacity Gallons (Liters)	Gas Volume Cu. in. (Liters)	Max. WP psi (bar)	Weight Lbs. (kg)	Dimensions, inch (mm)							Hydraulic Ports	
				A	B	C	D	E	F	G	H Size ¹ (Thread)	J Size (Thread)
1 Qt. (0.95)	60 (0.95)	3000 ² (207)	10 (4.5)	4.50 (114)	11.25 (286)	1.75 (45)	2.00 (51)	1.75 (45)	2.50 (63.5)	1.00 (25.4)	SAE #16 (1-5/16"-12)	N/A
1.0 (3.79)	231 (3.79)	3000 (207)	30 (13.3)	6.75 (171)	16.25 (413)	2.25 (58)	2.75 (70)	2.36 (59.9)	3.13 (79.5)	1.00 (25.4)	SAE #20 (1-5/8"-12)	SAE #6 (9/16"-18)
2.5 (9.46)	600 (9.8)	3000 (207)	80 (36)	9.00 (230)	21.25 (540)	2.25 (58)	3.50 (89)	3.00 (76.2)	4.13 (105)	1.00 (25.4)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
5.0 (18.9)	1203 (19.7)	3000 (207)	120 (55)	9.00 (230)	33.50 (851)	2.25 (58)	3.50 (89)	3.00 (76.2)	4.13 (105)	1.00 (25.4)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
10.0 (37.9)	2259 (37.0)	3000 (207)	220 (100)	9.00 (230)	54.50 (1384)	2.25 (58)	3.50 (89)	3.00 (76.2)	4.13 (105)	1.00 (25.4)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
15.0 (56.8)	3440 (56.3)	3000 (207)	300 (133)	9.00 (230)	78.00 (1981)	2.25 (58)	3.50 (89)	3.00 (76.2)	4.13 (105)	1.00 (25.4)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)

All dimensions subject to change without notice

¹ See page 12 for standard fluid port configurations. Optional Fluid Ports Available.

² In accordance with ASME VIII calculations only.

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax:
717-243-8865 Website: gpmcontrols.com | Email: info@gpmcontrols.com

BLADDER ACCUMULATORS



Specification No. ABA-002

ASME VIII Range 5000 psi

TECHNICAL

Maximum Working Pressure: 5000 psi @ 200°F

Minimum Test Pressure: 7500 psi

Nominal Capacities: 2.5, 5.0, 10.0 & 15.0 gal.

DESIGN

Shell: Designed and Manufactured in accordance with ASME Code Rules, Section VIII, Division 1


Material - Chrome Molybdenum Steel, SA372 Grade E Class 70
(Meets 4 : 1 Safety Requirements)

Separator Bag: Totally enclosed molded synthetic rubber bag in a range of materials. Integral steel stem fitted with gas valve assembly, sealing cap, O-ring, locknut and protective cap.

Fluid Port Assembly: Poppet type assembly manufactured in AISI 4130 carbon steel specifications, complete with molded retaining rings, locking ring and bleed plug.

Inspection: Shell certified throughout manufacture with witness testing by independent authorities, ASME approval and “U” code stamped.

Finish: One coat epoxy based primer. Special finishes available.

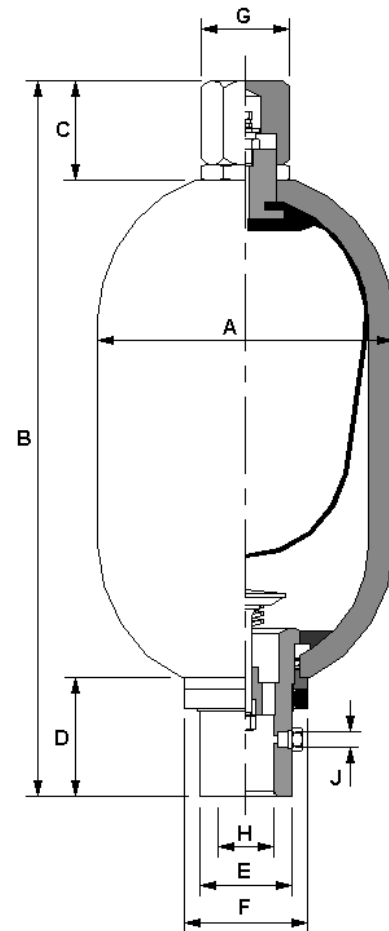

Nominal Capacity Gallons (Liters)	Gas Volume Cu. in. (Liters)	Max. WP psi (bar)	Weight Lbs. (kg)	Dimensions, inch (mm)							Hydraulic Ports	
				A	B	C	D	E	F	G Hex.	H Size ¹ (Thread)	J Size (Thread)
2.5 (9.46)	600 (9.8)	5000 (345)	125 (57)	9.75 (248)	24.00 (610)	3.25 (83)	4.00 (102)	3.00 (76.2)	4.00 (102)	2.50 (63.5)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
5.0 (18.9)	1203 (19.7)	5000 (345)	200 (91)	9.75 (248)	36.00 (914)	3.25 (83)	4.00 (102)	3.00 (76.2)	4.00 (102)	2.50 (63.5)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
10.0 (37.9)	2259 (37.0)	5000 (345)	350 (159)	9.75 (248)	57.00 (1448)	3.25 (83)	4.00 (102)	3.00 (76.2)	4.00 (102)	2.50 (63.5)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
15.0 (56.8)	3440 (56.3)	5000 (345)	500 (227)	9.75 (248)	80.00 (2032)	3.25 (83)	4.00 (102)	3.00 (76.2)	4.00 (102)	2.50 (63.5)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)

All dimensions subject to change without notice

¹ See page 12 for standard fluid port configurations. Optional Fluid Ports Available.

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com

BLADDER ACCUMULATORS



Specification No. ABA-003

ASME VIII Range (Top Repairable) 3000 psi

TECHNICAL

Maximum Working Pressure: 3000 psi @ 200°F

Minimum Test Pressure: 4500 psi

Nominal Capacities: 2.5, 5.0, 10.0 & 15.0 gal.

DESIGN

Shell: Designed and Manufactured in accordance with ASME Code Rules, Section VIII, Division 1


Material - Chrome Molybdenum Steel, SA372 Grade E Class 70
(Meets 4 : 1 Safety Requirements)

Separator Bag: Totally enclosed molded synthetic rubber bag in a range of materials. Integral steel stem fitted with gas valve assembly, sealing cap, O-ring, locknut and protective cap.

Fluid Port Assembly: Poppet type assembly manufactured in AISI 4130 carbon steel specifications, complete with molded retaining rings, locking ring and bleed plug.

Inspection: Shell certified throughout manufacture with witness testing by independent authorities, ASME approval and “U” code stamped.

Finish: One coat epoxy based primer. Special finishes available.

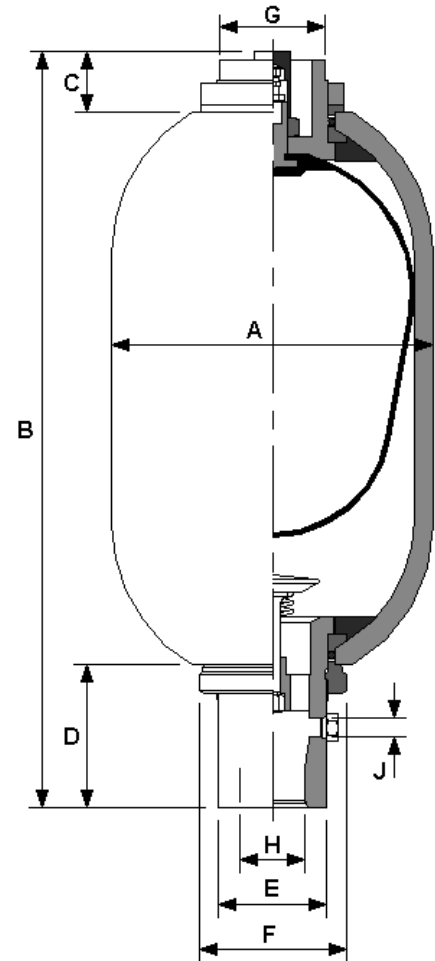

Nominal Capacity Gallons (Liters)	Gas Volume Cu. in. (Liters)	Max. WP psi (bar)	Weight Lbs. (kg)	Dimensions, inch (mm)							Hydraulic Ports	
				A	B	C	D	E	F	G	H Size ¹ (Thread)	J Size (Thread)
2.5 (9.46)	600 (9.8)	3000 (207)	80 (36)	9.00 (230)	21.25 (540)	1.75 (45)	3.50 (89)	3.00 (76.2)	4.13 (105)	3.00 (76.2)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
5.0 (18.9)	1203 (19.7)	3000 (207)	120 (55)	9.00 (230)	33.50 (851)	1.75 (45)	3.50 (89)	3.00 (76.2)	4.13 (105)	3.00 (76.2)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
10.0 (37.9)	2259 (37.0)	3000 (207)	220 (100)	9.00 (230)	54.50 (1384)	1.75 (45)	3.50 (89)	3.00 (76.2)	4.13 (105)	3.00 (76.2)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
15.0 (56.8)	3440 (56.3)	3000 (207)	300 (133)	9.00 (230)	78.00 (1981)	1.75 (45)	3.50 (89)	3.00 (76.2)	4.13 (105)	3.00 (76.2)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)

All dimensions subject to change without notice

¹ See page 12 for standard fluid port configurations. Optional Fluid Ports Available.

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com

BLADDER ACCUMULATORS



Specification No. ABA-004

ASME VIII Range (Top Repairable) 5000 psi

TECHNICAL

Maximum Working Pressure: 5000 psi @ 200°F

Minimum Test Pressure: 7500 psi

Nominal Capacities: 2.5, 5.0, 10.0 & 15.0 gal.

DESIGN

Shell: Designed and Manufactured in accordance with ASME Code Rules, Section VIII, Division 1


Material - Chrome Molybdenum Steel, SA372 Grade E Class 70
(Meets 4 : 1 Safety Requirements)

Separator Bag: Totally enclosed molded synthetic rubber bag in a range of materials. Integral steel stem fitted with gas valve assembly, sealing cap, O-ring, locknut and protective cap.

Fluid Port Assembly: Poppet type assembly manufactured in AISI 4130 carbon steel specifications, complete with molded retaining rings, locking ring and bleed plug.

Inspection: Shell certified throughout manufacture with witness testing by independent authorities, ASME approval and “U” code stamped.

Finish: One coat epoxy based primer. Special finishes available.

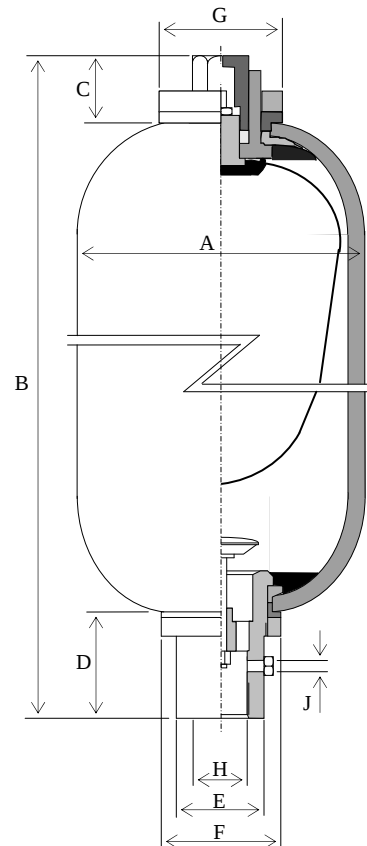

Nominal Capacity Gallons (Liters)	Gas Volume Cu. in. (Liters)	Max. WP psi (bar)	Weight Lbs. (kg)	Dimensions, inch (mm)							Hydraulic Ports	
				A	B	C	D	E	F	G Hex.	H Size ¹ (Thread)	J Size (Thread)
2.5 (9.46)	600 (9.8)	5000 (345)	125 (57)	9.75 (248)	24.00 (610)	3.25 (83)	4.00 (102)	3.00 (76.2)	4.00 (102)	2.50 (63.5)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
5.0 (18.9)	1203 (19.7)	5000 (345)	200 (91)	9.75 (248)	36.00 (914)	3.25 (83)	4.00 (102)	3.00 (76.2)	4.00 (102)	2.50 (63.5)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
10.0 (37.9)	2259 (37.0)	5000 (345)	350 (159)	9.75 (248)	57.00 (1448)	3.25 (83)	4.00 (102)	3.00 (76.2)	4.00 (102)	2.50 (63.5)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
15.0 (56.8)	3440 (56.3)	5000 (345)	500 (227)	9.75 (248)	80.00 (2032)	3.25 (83)	4.00 (102)	3.00 (76.2)	4.00 (102)	2.50 (63.5)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)

All dimensions subject to change without notice

¹ See page 12 for standard fluid port configurations. Optional Fluid Ports Available.

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com

BLADDER ACCUMULATORS



Specification No. ABA-001- - -T

Transfer Barriers

ASME VIII Range 3000 psi

TECHNICAL

Maximum Working Pressure: 3000 psi @ 200°F

Minimum Test Pressure: 4500 psi

Nominal Capacities: 2.5, 5.0, 10.0 & 15.0 gal.

DESIGN

Shell: Designed and Manufactured in accordance with ASME Code Rules, Section VIII, Division 1


Material - Chrome Molybdenum Steel, SA372 Grade E, Class 70
(Meets 4 : 1 Safety Requirements)

Separator Bag: Totally enclosed molded synthetic rubber bag in a range of materials. Integral steel stem fitted with gas tube, O-ring seals, locknut and gas tube adapter nut.

Fluid Port Assembly: Poppet type assembly manufactured in AISI 4130 carbon steel specifications, complete with molded retaining rings, locking ring and bleed plug.

Inspection: Shell certified throughout manufacture with witness testing by independent authorities, ASME approval and “U” code stamped.

Finish: One coat epoxy based primer. Special finishes available.

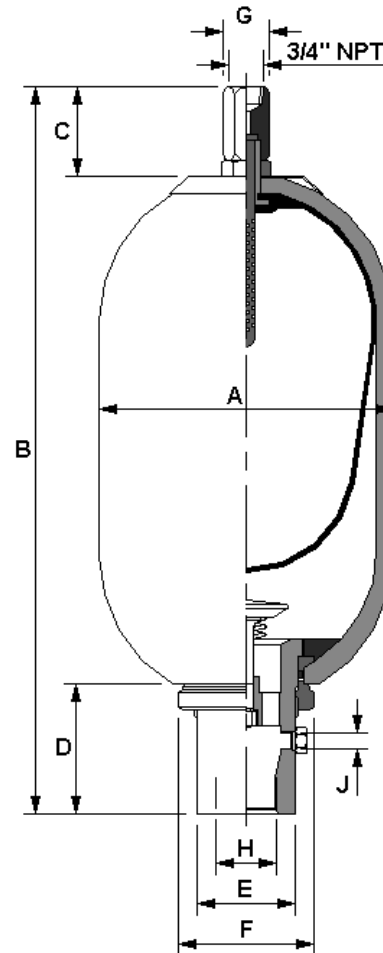

Nominal Capacity Gallons (Liters)	Gas Volume Cu. in. (Liters)	Max. WP psi (bar)	Weight Lbs. (kg)	Dimensions, inch (mm)								Hydraulic Ports	
				A	B	C	D	E	F	G Hex.		H Size ¹ (Thread)	J Size (Thread)
2.5 (9.46)	600 (9.8)	3000 (207)	80 (36)	9.00 (230)	21.75 (553)	2.75 (70)	3.50 (89)	3.00 (76.2)	4.13 (105)	1.25 (31.8)		SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
5.0 (18.9)	1203 (19.7)	3000 (207)	120 (55)	9.00 (230)	34.00 (864)	2.75 (70)	3.50 (89)	3.00 (76.2)	4.13 (105)	1.25 (31.8)		SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
10.0 (37.9)	2259 (37.0)	3000 (207)	220 (100)	9.00 (230)	55.00 (1397)	2.75 (70)	3.50 (89)	3.00 (76.2)	4.13 (105)	1.25 (31.8)		SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)
15.0 (56.8)	3440 (56.3)	3000 (207)	300 (133)	9.00 (230)	78.50 (1994)	2.75 (70)	3.50 (89)	3.00 (76.2)	4.13 (105)	1.25 (31.8)		SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)

All dimensions subject to change without notice

¹ See page 12 for standard fluid port configurations. Optional Fluid Ports Available.

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com

BLADDER ACCUMULATORS



Specification No. ABA-001- - - G

Gas Bottles

ASME VIII Range 3000 psi

TECHNICAL

Maximum Working Pressure: 3000 psi @ 200°F

Minimum Test Pressure: 4500 psi

Nominal Capacities: 2.5, 5.0, 10.0 & 15.0 gal.

DESIGN

Shell: Designed and Manufactured in accordance with ASME Code Rules, Section VIII, Division 1


Material - Chrome Molybdenum Steel, SA372 Grade E, Class 70
(Meets 4 : 1 Safety Requirements)

Fluid Port Assembly: Assembly manufactured in AISI 4130 carbon steel specifications, complete with molded retaining rings, locking ring and bleed plug.

Drain Port Assembly: Molded Buna-N sealing adapter. Integral steel stem fitted with locknut and drain plug.

Inspection: Shell certified throughout manufacture with witness testing by independent authorities, ASME approval and “U” code stamped.

Finish: One coat epoxy based primer. Special finishes available.

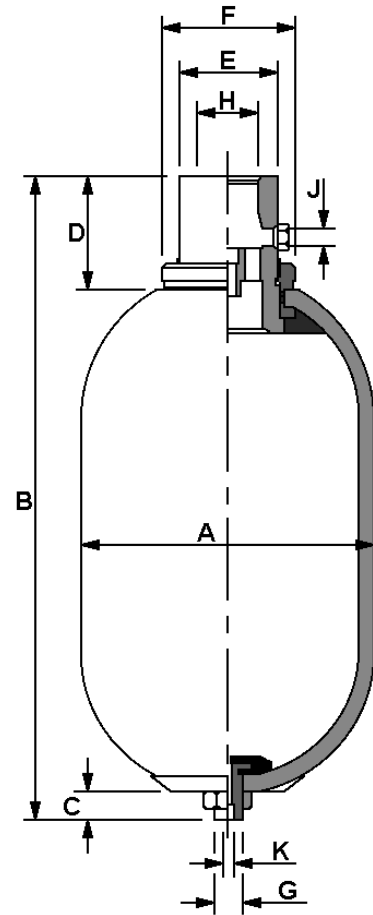

Nominal Capacity Gallons (Liters)	Gas Volume Cu. in. (Liters)	Max. WP psi (bar)	Weight Lbs. (kg)	Dimensions, inch (mm)							Ports		
				A	B	C	D	E	F	G	H Size ¹ (Thread)	J Size (Thread)	K Size (Thread)
2.5 (9.46)	600 (9.8)	3000 (207)	80 (36)	9.00 (230)	20.38 (518)	0.88 (22)	3.50 (89)	3.00 (76.2)	4.13 (105)	0.88 (22)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)	SAE #3 (3/8"-24)
5.0 (18.9)	1203 (19.7)	3000 (207)	120 (55)	9.00 (230)	32.63 (829)	0.88 (22)	3.50 (89)	3.00 (76.2)	4.13 (105)	0.88 (22)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)	SAE #3 (3/8"-24)
10.0 (37.9)	2259 (37.0)	3000 (207)	220 (100)	9.00 (230)	53.63 (1362)	0.88 (22)	3.50 (89)	3.00 (76.2)	4.13 (105)	0.88 (22)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)	SAE #3 (3/8"-24)
15.0 (56.8)	3440 (56.3)	3000 (207)	300 (133)	9.00 (230)	77.13 (1959)	0.88 (22)	3.50 (89)	3.00 (76.2)	4.13 (105)	0.88 (22)	SAE #24 (1-7/8"-12)	SAE #6 (9/16"-18)	SAE #3 (3/8"-24)

All dimensions subject to change without notice

¹ See page 12 for standard fluid port configurations. Optional Fluid Ports Available.

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com

BLADDER ACCUMULATORS



Accessories

Available from Schrupp



SCA-313
Charging & Gauging
Head Assembly



SCA-31 3,000 psi Pressure Gauge
SCA-49 2,000 psi Pressure Gauge
SCA-51 5,000 psi Pressure Gauge



SCA-53 1-15 Gallon Valve Stem
SCA-52 5,000 psi Gas Valve
SCA-47 Valve Stem Extension



SCA-314 Head Assembly



SCA-44 Hose Assembly



SBP Bag Puller Rod
SCH-CT Valve Core Cross Type Tool
SCH-SW Spanner Wrench




SCA-3 Complete 3,000 psi Charging Assembly

BLADDER ACCUMULATORS



Mounting Brackets for Accumulators

Designed for specific use on Accumulator installation, both Clamps & Bases are supplied complete with Rubber Support to ensure rigid mounting.

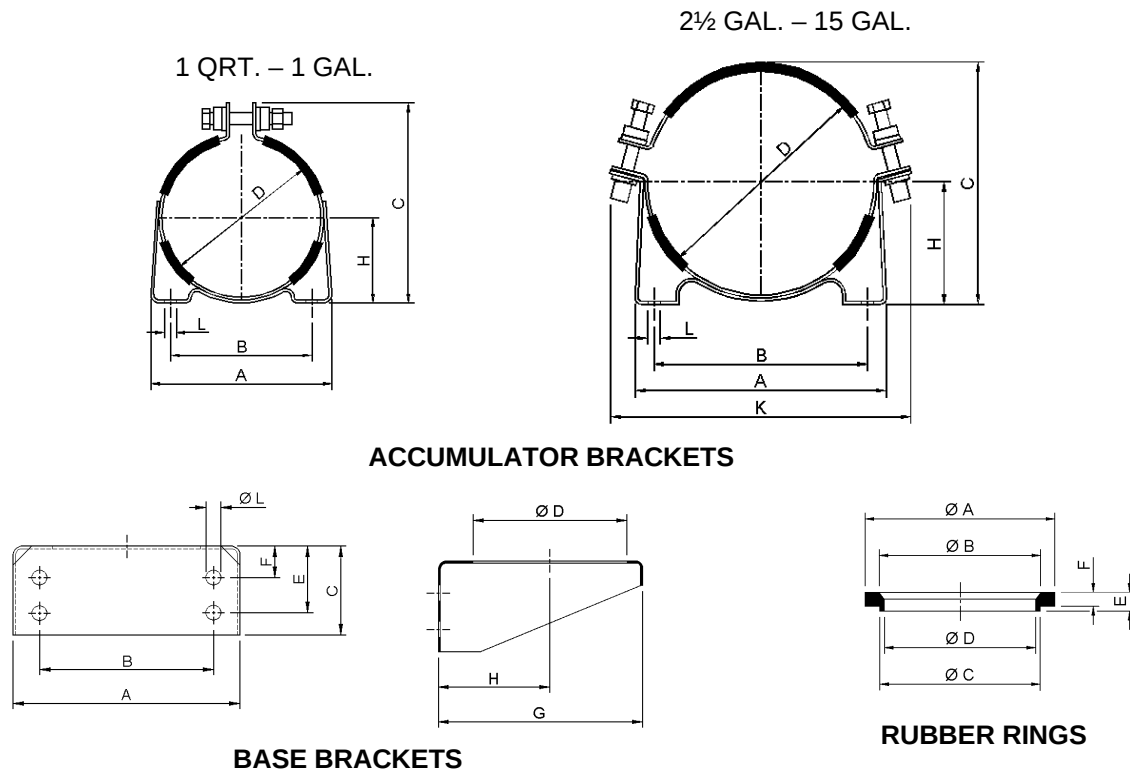

ACCUMULATOR BRACKETS									
MODEL	A In. (mm)	B In. (mm)	C In. (mm)	D (DIA.) In. (mm)	H In. (mm)	K In. (mm)	L (Slot) In. (mm)		WIDTH In. (mm)
SCH-1 QRT	5.26 (134)	3.94 (100)	6.68 (170)	4.51 (115)	2.87 (73)	---	0.35 x 0.50 (8.9 x 12.7)		1.25 (32)
SCH-1 GAL	7.50 (191)	6.02 (153)	9.00 (229)	6.75 (171)	3.94 (100)	---	0.35 x 0.50 (8.9 x 12.7)		1.25 (32)
SCH-2.5-15 GAL	10.0 (254)	8.50 (216)	9.67 (246)	8.90 (226)	4.84 (123)	12.5 (317)	0.59 (15)		1.58 (40)
BASE BRACKETS WITH RUBBER RINGS									
MODEL	A In. (mm)	B In. (mm)	C In. (mm)	D (DIA.) In. (mm)	E In. (mm)	F In. (mm)	G In. (mm)	H In. (mm)	L (DIA.) In. (mm)
SB-1 GAL	10.2 (260)	7.87 (200)	3.94 (100)	4.72 (120)	2.95 (75)	1.38 (35)	8.86 (225)	3.94 (100)	0.67 (17)
SB-2.5-15 GAL	10.2 (260)	7.87 (200)	3.94 (100)	6.69 (170)	2.95 (75)	1.38 (35)	8.86 (225)	4.84 (123)	0.67 (17)
RUBBER RINGS									
MODEL	A In. (mm)	B In. (mm)	C In. (mm)	D (DIA.) In. (mm)	E In. (mm)	F In. (mm)	USE WITH BASE BRACKET NO.		
SCA-138	5.91 (150)	4.72 (120)	4.69 (119)	4.25 (108)	0.79 (20)	0.59 (15)	SB-1 GAL		
SCA-139	7.87 (200)	6.69 (170)	6.65 (169)	6.26 (159)	0.79 (20)	0.59 (15)	SB-2.5 GAL – 15 GAL		

All dimensions subject to change without notice

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com

BLADDER ACCUMULATORS



Replacement Bladders

3000 PSI BLADDER KITS

Size	Bladder Material & Part No.				
	Buna-N	Butyl	EPR	Viton	Low Temp.
1 Quart	ABA-001-B-.25gal-N	ABA-001-B-.25gal-B	ABA-001-B-.25gal-E	ABA-001-B-.25gal-V	ABA-001-B-.25gal-L
1 Gallon	ABA-001-B-1gal-N	ABA-001-B-1gal-B	ABA-001-B-1gal-E	ABA-001-B-1gal-V	ABA-001-B-1gal-L
2½ Gallon	ABA-001-B-2.5gal-N	ABA-001-B-2.5gal-B	ABA-001-B-2.5gal-E	ABA-001-B-2.5gal-V	ABA-001-B-2.5gal-L
5 Gallon	ABA-001-B-5gal-N	ABA-001-B-5gal-B	ABA-001-B-5gal-E	ABA-001-B-5gal-V	ABA-001-B-5gal-L
10 Gallon	ABA-001-B-10gal-N	ABA-001-B-10gal-B	ABA-001-B-10gal-E	ABA-001-B-10gal-V	ABA-001-B-10gal-L
15 Gallon	ABA-001-B-15gal-N	ABA-001-B-15gal-B	ABA-001-B-15gal-E	ABA-001-B-15gal-V	ABA-001-B-15gal-L

5000 PSI BLADDER KITS

Size	Bladder Material & Part No.				
	Buna-N	Butyl	EPR	Viton	Low Temp.
2½ Gallon	ABA-002-B-2.5gal-N	ABA-002-B-2.5gal-B	ABA-002-B-2.5gal-E	ABA-002-B-2.5gal-V	ABA-002-B-2.5gal-L
5 Gallon	ABA-002-B-5gal-N	ABA-002-B-5gal-B	ABA-002-B-5gal-E	ABA-002-B-5gal-V	ABA-002-B-5gal-L
10 Gallon	ABA-002-B-10gal-N	ABA-002-B-10gal-B	ABA-002-B-10gal-E	ABA-002-B-10gal-V	ABA-002-B-10gal-L
15 Gallon	ABA-002-B-15gal-N	ABA-002-B-15gal-B	ABA-002-B-15gal-E	ABA-002-B-15gal-V	ABA-002-B-15gal-L

3000 PSI TOP REPAIRABLE BLADDER KITS

Size	Bladder Material & Part No.				
	Buna-N	Butyl	EPR	Viton	Low Temp.
2½ Gallon	ABA-003-B-2.5gal-N	ABA-003-B-2.5gal-B	ABA-003-B-2.5gal-E	ABA-003-B-2.5gal-V	ABA-003-B-2.5gal-L
5 Gallon	ABA-003-B-5gal-N	ABA-003-B-5gal-B	ABA-003-B-5gal-E	ABA-003-B-5gal-V	ABA-003-B-5gal-L
10 Gallon	ABA-003-B-10gal-N	ABA-003-B-10gal-B	ABA-003-B-10gal-E	ABA-003-B-10gal-V	ABA-003-B-10gal-L
15 Gallon	ABA-003-B-15gal-N	ABA-003-B-15gal-B	ABA-003-B-15gal-E	ABA-003-B-15gal-V	ABA-003-B-15gal-L

5000 PSI TOP REPAIRABLE BLADDER KITS


Size	Bladder Material & Part No.				
	Buna-N	Butyl	EPR	Viton	Low Temp.
2½ Gallon	ABA-004-B-2.5gal-N	ABA-004-B-2.5gal-B	ABA-004-B-2.5gal-E	ABA-004-B-2.5gal-V	ABA-004-B-2.5gal-L
5 Gallon	ABA-004-B-5gal-N	ABA-004-B-5gal-B	ABA-004-B-5gal-E	ABA-004-B-5gal-V	ABA-004-B-5gal-L
10 Gallon	ABA-004-B-10gal-N	ABA-004-B-10gal-B	ABA-004-B-10gal-E	ABA-004-B-10gal-V	ABA-004-B-10gal-L
15 Gallon	ABA-004-B-15gal-N	ABA-004-B-15gal-B	ABA-004-B-15gal-E	ABA-004-B-15gal-V	ABA-004-B-15gal-L

FLUID PORTS

Fluid Port Specifications (Internal Threads)	1 Quart, 3000 psi Bladder Accumulator		1 Gallon, 3000 psi Bladder Accumulator		2½-15 Gallon, 3000 psi Bladder Accumulator		2½-15 Gallon, 5000 psi Bladder Accumulator	
	N	1" NPT	N	1¼" NPT	N	2" NPT	N	2" NPT
	S	1-5/16"-12 SAE	S	1-5/8"-12 SAE	S	1-7/8"-12 SAE	S	1-7/8"-12 SAE
					F	2" Code 61	F	1½" Code 62

CHARGING GAS VALVE

SCA-53 - 3000 PSI
SCA-52 - 5000 PSI



BLADDER ACCUMULATORS



Ordering Information

MODEL CODE	ABA					
TYPE						
001 - 3,000 psi Bottom Repairable						
002 - 5,000 psi Bottom Repairable						
003 - 3,000 psi Top Repairable						
004 - 5,000 psi Top Repairable						
FLUID PORT						
S - SAE Threaded						
N - NPT Threaded						
F - Split Flanged						
NOMINAL SIZE						
.25GAL - 1 quart			5GAL - 5 gallon			
1GAL - 1 gallon			10GAL - 10 gallon			
2.5GAL - 2.5 gallon			15GAL - 15 gallon			
BLADDER MATERIAL						
N - Buna-N			B - Butyl			
V - Viton			E - EPR			
LT - Low Temperature Buna-N						
AVAILABLE OPTIONS						
G - Gas Bottle						
T - Transfer Barrier						
W - Water Service (Nickel Plated)						
22 - Appendix 22 Approval						

Not all combinations are available. See specification sheets for availability.

Accumulator Charging Assemblies

MODEL CODE	SCA -	
PRESSURE RANGE		
3 - 3,000 psi		
5 - 5,000 psi		
48 - 3,000 psi w/ 2,000 psi Gauge		

See accessories page for other available accumulator accessories.

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com

BLADDER ACCUMULATORS



Maintenance Instructions

Tools needed to repair Schrupp Bladder Accumulators.

Part Number	Description
SCH-CT	Valve Core Tool
SBP-1QT-2.5GAL	Bag Puller Rod (1qt-2.5gal)
SBP-5GAL	Bag Puller Rod (5gal)
SBP-10GAL	Bag Puller Rod (10gal)
SBP-15GAL	Bag Puller Rod (15gal)
SCH-SW	Spanner Wrench

DISASSEMBLING THE ACCUMULATOR

1. Turn off system.
2. Release all hydraulic pressure from the system by opening the safety valve block or the control valve.
3. Remove the accumulator from the system.
4. Remove protective cap and valve cap from accumulator.
5. Using the valve core tool release the gas precharge pressure from the bladder.
6. Securely clamp the accumulator in a vise (preferably a chain vise). Make sure strips of padding or metal on the vise protect the shell.
7. Remove core from gas valve using valve core tool.
8. Remove bleeder plug from the fluid port and poppet assembly (if applicable).
9. Remove locknut from the fluid port and poppet assembly using a spanner wrench and an adjustable wrench.
10. Remove metal spacer (if applicable).
11. Push fluid port and poppet assembly into the shell.
12. Remove back-up ring, o-ring, o-ring washer, and anti-extrusion from the fluid port. Fold the anti-extrusion ring to remove from the shell.
13. Remove fluid port and poppet assembly from the shell.
14. Remove the bladder nut from the valve stem. Hold the valve stem with a wrench to prevent the bladder from twisting.
15. Depress the bladder and eliminate as much gas pressure as possible.
16. Remove the old bladder out of the bottom of the accumulator.

BLADDER ACCUMULATORS



Maintenance Instructions

REASSEMBLING THE ACCUMULATOR

1. Remove the valve core from the new bladder to release all of the air. Replace valve core.
2. Pour clean hydraulic oil into the shell to act as a lubricant.
3. Put the bladder puller rod into the shell through the valve stem opening, so that the end of the rod comes out through the fluid port opening.
4. Attach the bladder puller rod to the valve stem of the new bladder.
5. Carefully pull the bladder through the fluid port opening and the valve stem through the valve stem opening.
6. Detach the bladder puller rod and replace the nameplate and bladder nut.
7. Push the fluid port and poppet assembly into the shell.
8. Replace the anti-extrusion ring inside the shell.
9. Lubricate and Replace metal o-ring washer, o-ring, and back-up ring.
10. Pull the fluid port through the opening in the accumulator until it seats firmly.
11. Replace the metal space (if applicable) and the lock nut and hand tighten.
12. Using **DRY NITROGEN ONLY**, slowly pressurize the bladder with enough pressure (approximately 5 psig) to hold the fluid port and poppet assembly in place.
13. While holding the fluid port with an adjustable wrench, to prevent spinning, securely tighten the lock nut with the spanner wrench.
14. Replace the bleeder into the fluid port and poppet assembly (if applicable).

PRECHARGING

1. Remove protective cap and gas valve cap.
2. Install charging assembly on to the valve stem.
3. Fill the accumulator with system fluid through fluid port to provide cushion.
4. Using **DRY NITROGEN ONLY!!** Slowly precharge accumulator to 50 psi.
5. Continue to precharge to required pressure.
6. Remove the charging assembly, check for gas leakage at valve stem.
7. Replace gas valve cap and protective cap.

NOTE: It is recommended that the precharge pressure be checked at regular intervals to ensure optimal performance of the accumulator. A drop in precharge could cause damage to the bladder.

Recommended Precharge Pressure (P_0)

Auxiliary Power Source	$P_0 = 0.9 \times P_1$
Shock Absorption	$P_0 = (0.6 \text{ to } 0.9) \times P_1$
Pulsation Dampening	$P_0 = (0.6 \text{ to } 0.8) \times P_1$
P_1 = Minimum Working Pressure	

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com

BLADDER ACCUMULATORS





Maintenance Instructions

ACCUMULATOR ASSEMBLY	
ITEM	DESCRIPTION
1	SHELL
2	BLADDER
3	NAME PLATE
4	GAS VALVE
5	BLADDER NUT
6	PROTECTIVE CAP
7	FLUID PORT ASSEMBLY
8	ANTI-EXTRUSION RING
9	METAL O-RING WASHER
10	O-RING
11	BACK-UP RING
12	METAL SPACER
13	LOCK NUT
14	BLEEDER PLUG
15	BLEEDER PLUG O-RING

Note: Item 12, Metal Spacer, is no longer required in all applications.

BLADDER KIT	
ITEM	DESCRIPTION
2	BLADDER
4	GAS VALVE
9	METAL O-RING WASHER
10	O-RING
11	BACK-UP RING

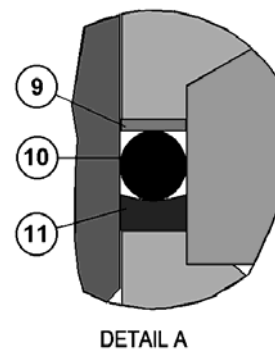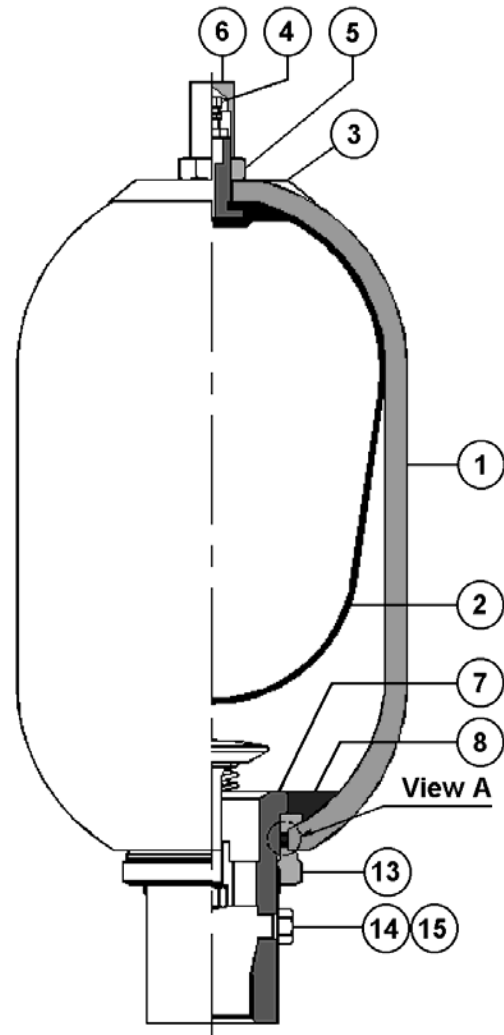

BLADDER ACCUMULATORS



Specification No. ADA-HTR

Top Repairable

TECHNICAL

Maximum Working Pressure: 3045 psi

Test Pressure: 4567 psi

Nominal Capacities: 20, 40, 90 cu.in., 1, 2.5 Ga

DESIGN

Body: Carbon steel painted black. An optional body construction with Zinc Dichromate plating, internally and externally, is available by adding a T to the end of the part number.

Gas Valve: Standard: SCA-162, $P_{max} = 4350$ psi
Optional: SCA-53, $P_{max} = 3000$ psi

Bladder: Buna-N (Alternatives Available).
Bladder is suitable for use with mineral oil and non-aggressive fluids.

Installation: Mounted in any position.

Working Temperatures: $5^{\circ}\text{F} \Rightarrow 194^{\circ}\text{F}$

Pressure Ratio: Recommended: $P_2:P_0 = 2.5:1$
Maximum: $P_2:P_0 = 4:1$

Special Modifications: Diaphragms for working temperatures from $-60^{\circ}\text{F} \Rightarrow 180^{\circ}\text{F}$

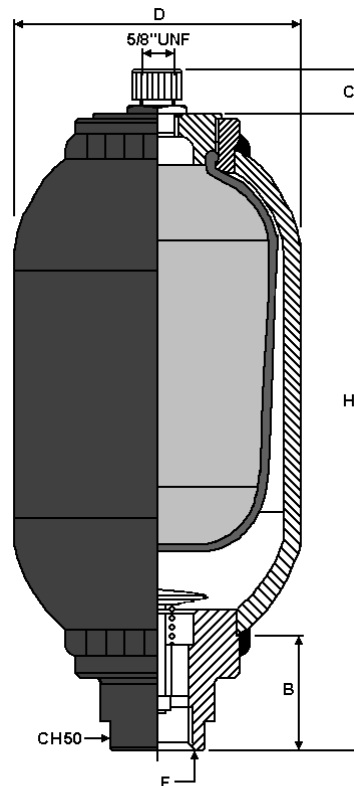


Fig. 2

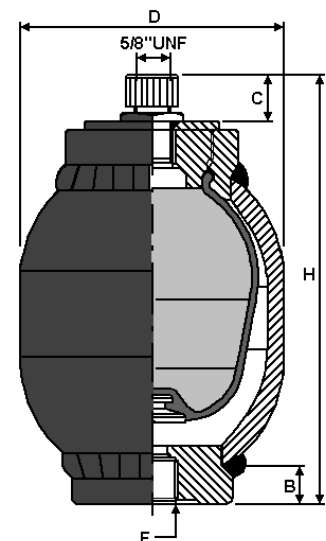


Fig. 1

Part No. ADA-HTR	Gas Volume cu. in. (Liters)	Max. W.P. PSI (bar)	Weight lbs. (Kg.)	Max. Flow gpm (l/min)	Dimensions, inch (mm)				Hydraulic Ports F Size (Thread)	Figure No.
					H	D	C	B		
20CI	21.4 (0.35)	3045 (210)	5.5 (2.5)	11.9 (45)	6.10 (155)	3.62 (92)	0.91 (23)	0.79 (20)	M 18 x1.5	1
40CI	42.7 (0.7)	3045 (210)	8.2 (3.7)	10.6 (40)	8.66 (220)	3.62 (92)	0.91 (23)	0.79 (20)	M 18 x1.5	1
90CI	91.5 (1.5)	3045 (210)	13.0 (5.9)	10.6 (40)	10.43 (265)	4.53 (115)	0.91 (23)	0.98 (25)	M 18 x1.5	1
1GAL	274.6 (4.5)	3045 (210)	30.9 (14)	58.1 (220)	14.37 (365)	6.69 (170)	0.91 (23)	1.97 (50)	3/4" BSP	2
1GAL.1	274.6 (4.5)	3045 (210)	35.3 (16)	105.6 (400)	15.55 (395)	6.69 (170)	0.91 (23)	3.15 (80)	1-1/4" BSP	2
2.5GAL	610.2 (10)	4350 (300)	68.4 (31)	79.3 (300)	25.20 (640)	6.69 (170)	0.91 (23)	3.15 (80)	1-1/4" BSP	2

All dimensions subject to change without notice.

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com

DIAPHRAGM ACCUMULATORS



Specification No. ADA-H

TECHNICAL

Maximum Working Pressure: 3045 psi

Test Pressure: 4567 psi

Nominal Capacities: 10, 20, 25, 40, 60, 85 cu.in.

DESIGN

Body: Cold formed steel with ends welded in protected argon atmosphere.


Diaphragm: Buna-N (Alternatives Available).
Non replaceable diaphragm is suitable for use with mineral oils and non-aggressive fluids.

Installation: Mounted in any position.

Working Temperatures: 5°F ⇒ 194°F

Pressure Ratio: Recommended: $P_2:P_0 = 2.5:1$
Maximum: $P_2:P_0 = 4:1$

Special Modifications: Diaphragms for working temperatures from -60°F ⇒ 180°F

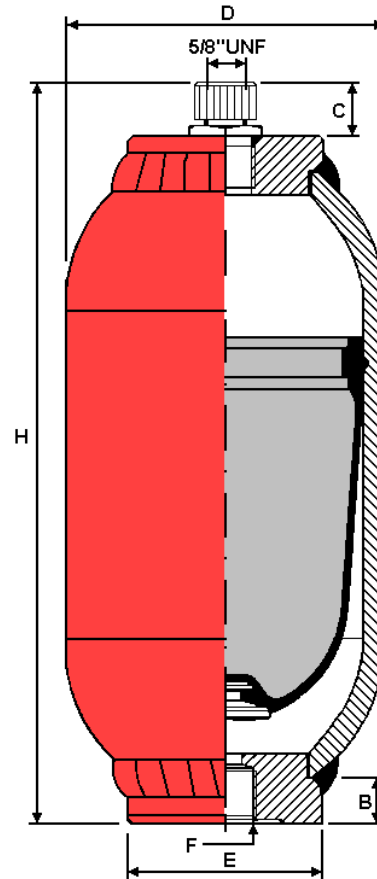

Part No.	Gas Volume cu. in. (Liters)	Max. W.P. PSI (bar)	Weight lbs. (Kg.)	Max. Flow gpm (l/min)	Dimensions, inch (mm)					Hydraulic Ports
					H	D	E	C	B	F Size (Thread)
10CI	9.2 (0.15)	3625 (250)	2.6 (1.2)	10.6 (40)	5.59 (142)	2.76 (70)	1.77 (45)	0.91 (23)	0.59 (15)	SAE #8 (3/4"-16)
20CI	21.4 (0.35)	3625 (250)	3.8 (1.7)	9.2 (35)	8.07 (205)	2.76 (70)	1.38 (35)	0.91 (23)	0.59 (15)	SAE #8 (3/4"-16)
25CI	27.5 (0.45)	3625 (250)	4.2 (1.9)	13.2 (50)	6.57 (167)	3.62 (92)	2.17 (55)	0.91 (23)	0.67 (17)	SAE #8 (3/4"-16)
40CI	42.7 (0.7)	3625 (250)	6.0 (2.7)	10.6 (40)	8.66 (220)	3.62 (92)	1.57 (40)	0.91 (23)	0.67 (17)	SAE #8 (3/4"-16)
60CI	61.0 (1.0)	3625 (250)	7.7 (3.5)	13.2 (50)	7.87 (200)	4.53 (115)	2.36 (60)	0.91 (23)	0.75 (19)	SAE #8 (3/4"-16)
85CI	85.4 (1.4)	3625 (250)	10.8 (4.9)	10.6 (40)	10.63 (270)	4.53 (115)	2.36 (60)	0.91 (23)	0.75 (19)	SAE #8 (3/4"-16)
120CI	122 (2.0)	3625 (250)	12.8 (5.8)	10.6 (40)	13.78 (350)	4.53 (115)	2.36 (60)	0.91 (23)	0.75 (19)	SAE #8 (3/4"-16)
1GAL	231 (3.8)	3045 (210)	30.9 (14)	21.1 (80)	12.60 (320)	6.69 (170)	3.74 (95)	0.91 (23)	0.59 (15)	3/4" BSP

All dimensions subject to change without notice.

DIAPHRAGM ACCUMULATORS



Specification No. ADA-HST

TECHNICAL

Maximum Working Pressure: 4350 psi

Test Pressure: 6525 psi

Nominal Capacities: 5, 20, 30, 50, 80, 90, 140 cu.in.

DESIGN

Body: Forged steel machined and externally painted black. The accumulator body and cap consists of a special thread that results in the two halves to be normally self-locking under pressure. An optional body construction with Zinc Dichromate plating, internally and externally, is available by adding a T to the end of the part number.

Gas Valve: Standard: SCA-162, $P_{\max} = 4350$ psi
Optional: SCA-53, $P_{\max} = 3000$ psi

Diaphragm: Buna-N (Alternatives Available)

Installation: Mounted in any position.

Working Temperatures: $5^{\circ}\text{F} \Rightarrow 194^{\circ}\text{F}$

Pressure Ratio: Recommended: $P_2:P_0 = 2.5:1$
Maximum: $P_2:P_0 = 6:1$

Special Modifications: Diaphragms for working temperatures from $-60^{\circ}\text{F} \Rightarrow 300^{\circ}\text{F}$

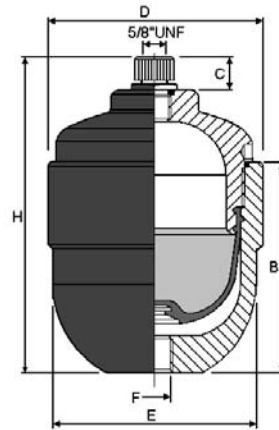


Fig. 1

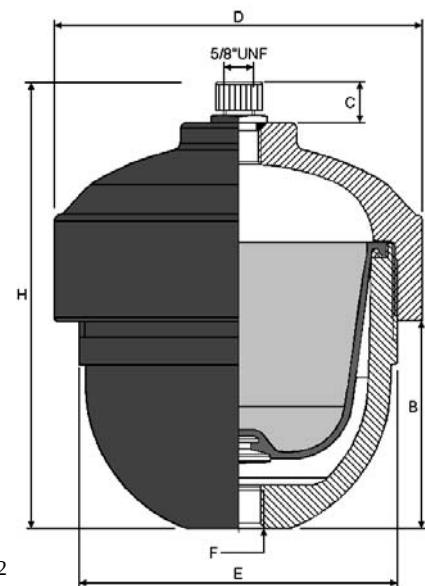


Fig. 2

Part No. ADA-HST	Gas Volume cu. in. (Liters)	Max. W.P. PSI (bar)	Weight lbs. (Kg.)	Max. Flow gpm (l/min)	Dimensions, inch (mm)					Hydraulic Ports F Size (Thread)	Figure No.
					H	D	E	C	B		
5CI	7 (0.12)	4350 (300)	4.6 (2.1)	11.9 (45)	5.55 (141)	3.11 (79)	2.95 (75)	0.91 (23)	3.58 (91)	SAE #8 (3/4"-16)	1
20CI	21 (0.35)	4350 (300)	7.1 (3.2)	13.2 (50)	6.02 (153)	3.90 (99)	3.74 (95)	0.91 (23)	3.58 (91)	SAE #8 (3/4"-16)	1
30CI	30 (0.5)	4350 (300)	11.0 (5.0)	15.9 (60)	6.30 (160)	4.88 (124)	4.53 (115)	0.91 (23)	4.21 (107)	SAE #8 (3/4"-16)	1
50CI	49 (0.8)	4350 (300)	12.8 (5.8)	15.9 (60)	7.09 (180)	5.43 (138)	4.72 (120)	0.91 (23)	3.03 (77)	SAE #8 (3/4"-16)	2
80CI	80 (1.3)	4350 (300)	17.5 (7.9)	14.5 (55)	9.06 (230)	4.88 (124)	4.53 (115)	0.91 (23)	7.68 (195)	SAE #8 (3/4"-16)	1
90CI	92 (1.5)	4350 (300)	19.2 (8.7)	14.5 (55)	10.63 (270)	5.43 (138)	4.72 (120)	1.91 (23)	6.69 (170)	SAE #8 (3/4"-16)	2
140CI	140 (2.3)	4350 (300)	23.2 (10.5)	14.5 (55)	14.17 (360)	5.43 (138)	4.72 (120)	0.91 (23)	6.69 (170)	SAE #8 (3/4"-16)	2

All dimensions subject to change without notice

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com

DIAPHRAGM ACCUMULATORS



Specification No. ADA-HSTPVC ADA-HSTP

TECHNICAL

Maximum Working Pressure: 145 psi

Test Pressure: 217 psi

Nominal Capacities: 5, 20, 40, 50, 90, 140, 300, 600 cu.in.

DESIGN


Body: PVC or Polypropylene constructed in two parts and joined with a special thread that under conditions of dynamic pressure tends to self-lock.

Diaphragm: Buna-N (Standard), Butyl, Nitrile, Polyurethane, EPDM, Viton, PVC, Hytrel, Alcryn

Installation: Mounted in any position.

Max. Working Temperatures: 122°F (PVC)
158°F (Polypropylene)

Pressure Ratio: Recommended: $P_2:P_0 = 2.5:1$
Maximum: $P_2:P_0 = 6:1$

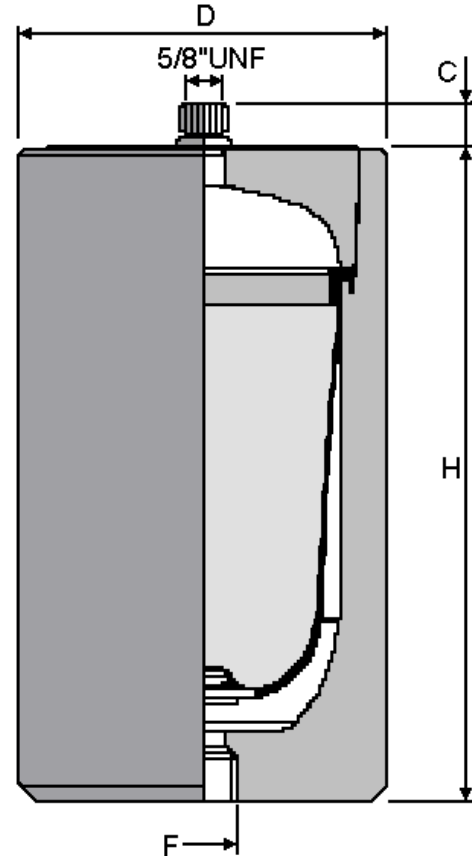

Part No. ADA-HSTPVC	Part No. ADA-HSTP	Gas Volume cu. in. (Liters)	Max. W.P. PSI (bar)	Weight lbs. (Kg.)	Dimensions, inch (mm)			Hydraulic Ports
					H	D	C	F Size (Thread)
5CI	5CI	7 (0.12)	145 (10)	2.6 (1.2)	5.43 (138)	3.15 (80)	0.91 (23)	SAE #6 (9/16"-18)
20CI	20CI	21 (0.35)	145 (10)	4.0 (1.8)	6.10 (155)	3.94 (100)	0.91 (23)	SAE #8 (3/4"-16)
40CI	40CI	43 (0.7)	145 (10)	5.3 (2.4)	8.07 (205)	3.94 (100)	0.91 (23)	SAE #8 (3/4"-16)
50CI	50CI	49 (0.8)	145 (10)	8.6 (3.9)	7.09 (180)	5.51 (140)	0.91 (23)	SAE #8 (3/4"-16)
90CI	90CI	92 (1.5)	145 (10)	13.2 (6.0)	10.63 (270)	5.51 (140)	1.91 (23)	SAE #12 (1 1/16"-12)
140CI	140CI	140 (2.3)	145 (10)	22.0 (10.0)	14.17 (360)	5.51 (140)	0.91 (23)	SAE #12 (1 1/16"-12)
300CI	300CI	305 (5)	145 (10)	39.7 (18.0)	16.93 (430)	7.87 (200)	0.91 (23)	SAE #24 (1 7/8"-12)
600CI	600CI	610 (10)	145 (10)	57.3 (26)	16.93 (730)	7.87 (200)	0.91 (23)	SAE #32 (2 1/2"-12)

All dimensions subject to change without notice

DIAPHRAGM ACCUMULATORS



Specification No. ADA-HSTX

TECHNICAL

Max. Working Pressure: 2175 / 3045 psi
On special request Working Pressure up to 7250 psi.

Test Pressure: 3250 / 4400 psi,
Nominal Capacities: 5, 20, 30, 40, 50, 90, 140,
275, 600 cu.in.

DESIGN

Body: 316 stainless steel, constructed in two parts and joined with a special thread that under conditions of dynamic pressure tends to self-lock. Constructed in accordance with ASME Sec. VIII, Div. 1

Diaphragm Available: Buna-N (Standard), Viton, Butyl, EPDM, Nitrile, etc.

Installation: Mounted in any position.

Pressure Ratio: Recommended: $P_2:P_0 = 2.5:1$
Maximum: $P_2:P_0 = 4:1$

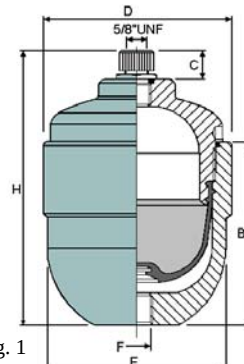


Fig. 1

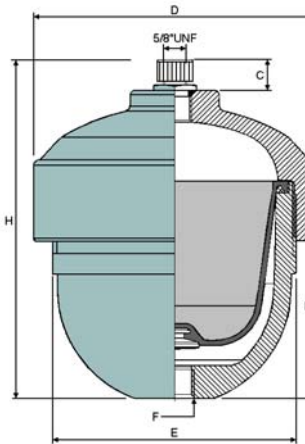


Fig. 2

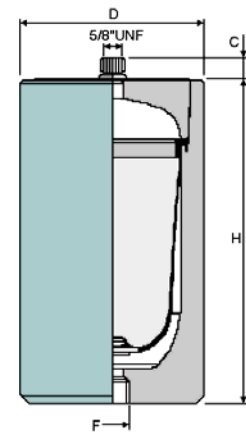


Fig. 3

Part No. ADA	Gas Volume cu. in. (Liters)	Max. W.P. PSI (bar)	Weight lbs. (Kg.)	Dimensions, inch (mm)					Hydraulic Ports F Size (Thread)	Figure No.
				H	D	E	C	B		
HSTX-5CI	6 (0.1)	2175/3045 (150/210)	4.9 (2.2)	5.43 (138)	3.11 (79)	2.95 (75)	0.91 (23)	3.58 (91)	BSP #6 (3/8-19)	1
HSTX- 20CI	21 (0.35)	2175/3045 (150/210)	8.2 (3.7)	6.10 (155)	3.94 (100)	3.70 (94)	0.91 (23)	3.82 (97)	BSP #8 (1/2-14)	1
HSTX-30CI	30 (0.5)	2175/3045 (150/210)	12.2 (5.5)	6.30 (160)	4.84 (123)	4.84 (123)	0.91 (23)	4.21 (107)	BSP #8 (1/2-14)	1
HSTX-40CI	40 (0.7)	2175/3045 (150/210)	11.1 (5)	8.07 (205)	3.94 (100)	3.70 (94)	0.91 (23)	6.30 (160)	BSP #8 (1/2-14)	1
HSTX-50CI	49 (0.8)	2175/3045 (150/210)	13.5 (6.1)	7.09 (180)	5.43 (138)	4.72 (120)	0.91 (23)	3.03 (77)	BSP #8 (1/2-14)	2
HSTX-90CI	92 (1.5)	2175/3045 (150/210)	19.2 (8.7)	10.63 (270)	5.43 (138)	4.72 (120)	0.91 (23)	6.69 (170)	BSP #12 (3/4"-14)	2
HSTX-140CI	140 (2.3)	2175/3045 (150/210)	23.2 (10.5)	14.17 (360)	5.43 (138)	4.72 (120)	0.91 (23)	6.69 (170)	BSP #12 (3/4"-14)	2
HSTX-275CI	275 (4.5)	2175/3045 (150/210)	53.0 (27)	14.57 (370)	7.09 (180)	7.09 (180)	0.71 (18)	-	BSP #12 (3/4"-14)	3
HSTX-600CI	610 (10)	2175/3045 (150/210)	100.0 (45)	29.13 (740)	7.09 (180)	-	0.71 (18)	-	BSP #20 (1 1/4"-11)	3

All dimensions subject to change without notice

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com

DIAPHRAGM ACCUMULATORS



CHARGING ASSEMBLY

Specification No. SCA-160

TECHNICAL


The precharge valve is an essential device for filling and checking nitrogen precharge in accumulators. Made of plated carbon steel, this valve can be used for a maximum working pressure of 350 Bar. It is supplied in a special case that includes a pressure gauge and 7 foot of hose for connection to the nitrogen bottle.

INSTRUCTION FOR USE

How To Check Nitrogen Pressure:

- If the accumulator is connected to the system, please check that there is no pressure on the oil side. Turn the valve control knob counterclockwise until it is fully disengaged and install it on the accumulator.
- Close the nitrogen discharge valve and turn the “AR” valve knob clockwise until the pressure gauge signals there that there is no internal pressure left or the knob is fully turned clockwise in the event that the accumulator is fully discharged.
- Once the nitrogen pressure is checked, slowly unscrew the discharge valve until the pressure starts decreasing. Once the desired nitrogen pressure is reached, fully unscrew the control valve knob, and open the nitrogen discharge valve to eliminate any residual pressure and then unscrew the “AR” valve from the accumulator and re-install the protective cap of the nitrogen valve on accumulator. Be sure that the protective cap is tightened securely.

Filling Of Nitrogen: Repeat the above mentioned operations connecting the nitrogen bottle quick release coupling before opening the control valve knob. Start filling the nitrogen very slowly. We recommend the use of a gas pressure reducing valve installed on the bottle in order to avoid over-pressurization of the accumulator body during the filling operation, especially when the precharge pressure is low. Check nitrogen precharge approximately every six months.

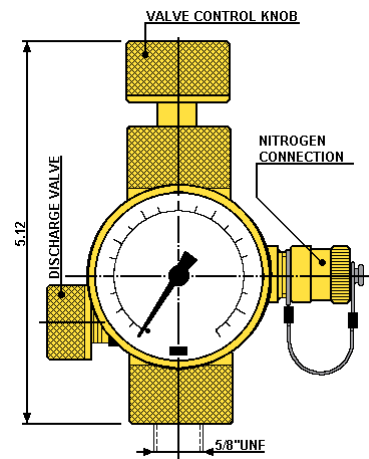


GAS VALVE

Specification No. SCA-162

TECHNICAL

The SCA-162 type valves mounted on our accumulators are made of plated carbon steel and can be used at a maximum working pressure of 400 Bar. In addition to their use on accumulators, they are a safety device for use on pressure vessels for various other applications of filling or controlling of a gas/fluid charge. These valves can also be used for an air drain on closed loop systems. They are also available in AISI 303 stainless steel.



BLADDER TYPE PULSATION DAMPENER



Specification No. HBX

TECHNICAL

Max. Working Pressure: See Data Below

Test Pressure: See Data Below

Nominal Capacities: 1.3, 2.5, 5, & 6.5 Gallon

DESIGN

Body: 316 stainless steel, constructed in three parts and joined with a special thread that under conditions of dynamic pressure tends to self-lock. Constructed in accordance with ASME Sec. VIII, Div. 1

Bladders Available: Buna-N, Butyl, Nitrile, Vamac, Silicone, Hypalon, Polyurethane, EPDM, etc.


Installation: Mounted in vertical position with the gas valve on top.

Pressure Ratio: Recommended: $P_2:P_0 = 2.5:1$

Maximum: $P_2:P_0 = 4:1$

* Note: the number of cycles is inversely proportional to the increase of the compression ratio.

For pulsation dampener applications the nitrogen precharge must be from 60% to 80% of the working pressure.

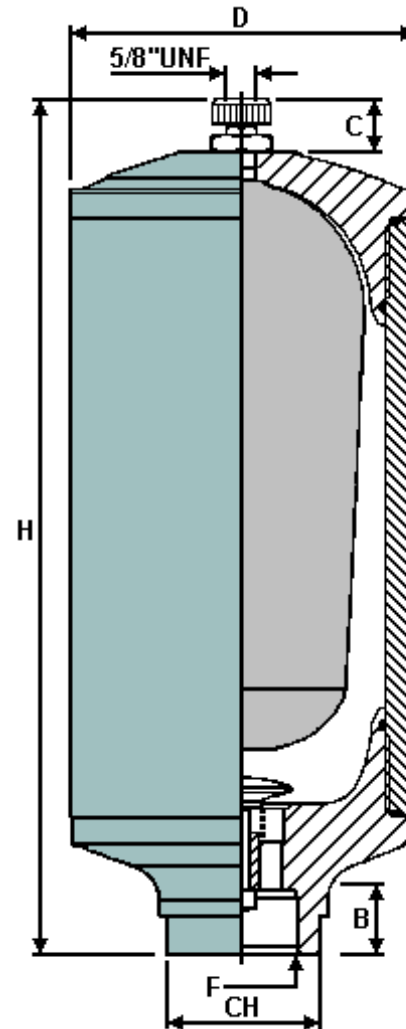

Part No.	Gas Volume cu. in. (Liters)	Max. W.P. PSI (bar)	Test Press. PSI (bar)	Weight lbs. (Kg.)	Max. Flow gpm (l/min)	Dimensions, inch (mm)					Hydraulic Ports
						H	D	CH	C	B	F Size (Thread)
HBX-1.3gal	305 (5)	3045 (20)	4567 (315)	55.1 (25)	47.5 (180)	31.50 (800)	4.92 (125)	2.56 (65)	1.38 (35)	2.36 (60)	1 1/4" NPT
HBX-2.5gal	610 (10)	3045 (210)	4567 (315)	108.0 (49)	97.7 (370)	29.13 (740)	7.09 (180)	3.15 (80)	1.38 (35)	2.36 (60)	2" NPT
HBX-5gal	1129 (18.5)	2175 (150)	3262 (225)	165.4 (75)	132.1 (500)	33.46 (850)	8.66 (220)	3.86 (98)	1.77 (45)	3.94 (100)	3" NPT
HBX-6.5gal	1520 (24.9)	2175 (150)	3262 (225)	198.4 (90)	145.3 (550)	39.76 (1010)	8.66 (220)	3.86 (98)	1.77 (45)	3.94 (100)	3" NPT

All dimensions subject to change without notice

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com

BLADDER TYPE PULSATION DAMPENER



Specification No. HTRX
BXT

Top Repairable

TECHNICAL

Max. Working Pressure: See Data Below

Test Pressure: See Data Below

Nominal Capacities: HTRX: 0.4 & 1.2 Gallon
BXT: 2.5, 5, & 6.5 Gallon

DESIGN

Body: 316 stainless steel, constructed in three parts welded together. Constructed in accordance with ASME Sec. VIII, Div. 1


Bladders Available: Buna-N, Butyl, Nitrile, Vamac, Silicone, Hypalon, Polyurethane, EPDM, etc.

Installation: Mounted in vertical position with the gas valve on top.

Pressure Ratio: Recommended: $P_2:P_0 = 2.5:1$
Maximum: $P_2:P_0 = 4:1$

* Note: the number of cycles is inversely proportional to the increase of the compression ratio.

For pulsation dampener applications the nitrogen precharge must be from 60% to 80% of the working pressure.

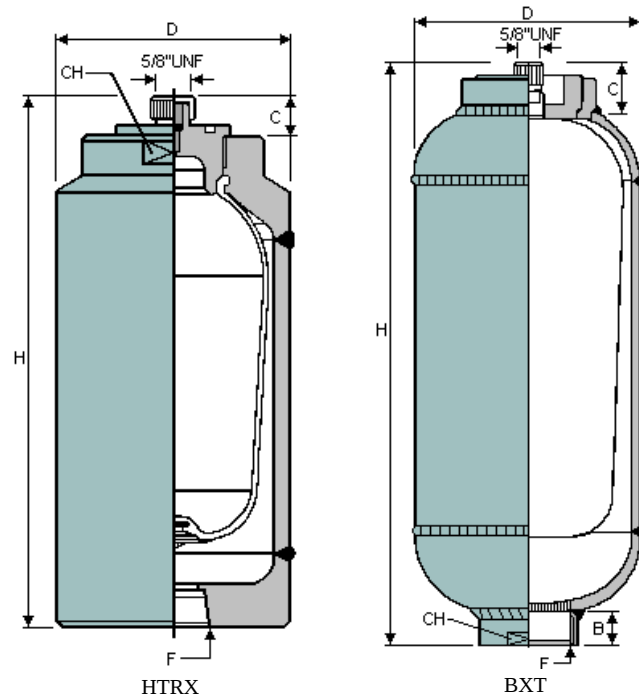

Part No. ADA	Gas Volume cu. in. (Liters)	Max. W.P. PSI (bar)	Test Press. PSI (bar)	Weight lbs. (Kg.)	Max. Flow gpm (l/min)	Dimensions, inch (mm)					Hydraulic Ports
						H	D	CH	C	B	F Size (Thread)
HTRX-0.4gal	92 (1.5)	1015 (70)	1523 (105)	14.80 (6.7)	39.6 (150)	10.63 (270)	4.49 (114)	3.15 (80)	0.79 (20)	-	1" NPT
HTRX- 1.2gal	275 (4.5)	725 (50)	1088 (75)	22.0 (10)	52.8 (200)	13.78 (350)	6.61 (168)	3.54 (90)	1.77 (45)	-	1 1/2" NPT
BXT-2.5gal	610 (10)	725 (50)	1088 (75)	35.3 (16)	47.5 (180)	29.92 (760)	6.61 (168)	2.76 (70)	1.57 (40)	1.73 (44)	2" BSP
BXT-5gal	1129 (18.5)	435 (30)	652 (45)	57.3 (26)	52.8 (200)	29.13 (740)	8.66 (220)	3.70 (94)	2.36 (60)	2.05 (52)	3" BSP
BXT-6.5gal	1520 (24.9)	435 (30)	652 (45)	66.2 (31)	47.5 (180)	35.04 (890)	8.66 (220)	3.70 (94)	2.36 (60)	2.05 (52)	3" BSP

All dimensions subject to change without notice






ACCUMULATOR SPECIAL EXECUTIONS

TECHNICAL

The catalog does not include all of the special modifications that are available from SCHRUPP. We recommend therefore that you contact our technical office concerning any special request, which cannot be satisfied by our standard product.

Following is a list of a few examples of special products already manufactured by SCHRUPP:

- Special flanges per request.
- Accumulators for very high pressures (7000-14000 psi) both in carbon steel and stainless steel.
- Accumulators in preheat vapor chambers
- Accumulators for pulsation dampening in both carbon steel and stainless steel.
- Accumulators manufactured in polypropylene and nylon.
- Accumulators manufactured in hastelloy.
- Inline silencers without elastomers for aggressive fluids.
- Inline silencers without elastomers for extremely high temperature fluids.
- Inline silencers with elastomers without precharge pressure.
- P.T.F.E. diaphragm dampers with stainless steel, PVC or polypropylene construction.

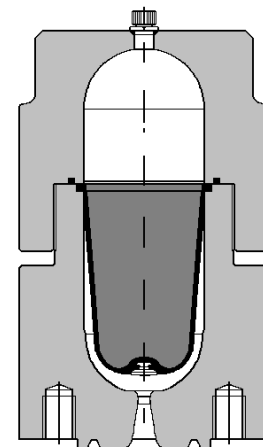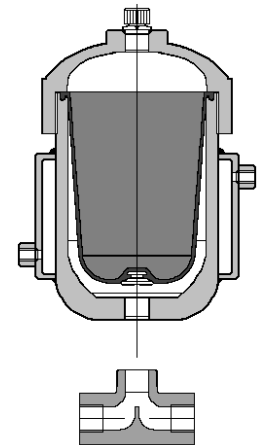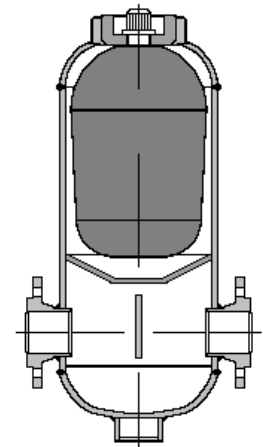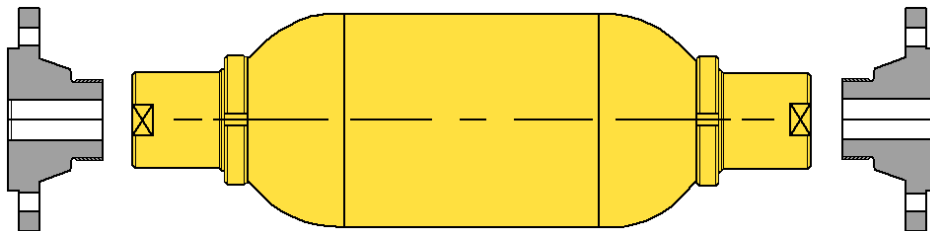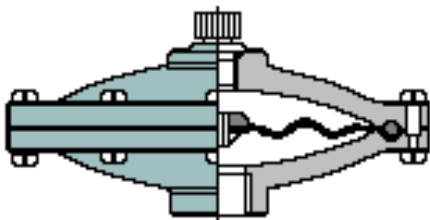

GPM Controls, LLC

1607 Industrial Drive | Carlisle, PA 17013 | Phone: 717-218-6565 | Fax: 717-243-8865
Website: gpmcontrols.com | Email: info@gpmcontrols.com



SCHRUPP GAS CHARGING KIT

Complete set for accumulator gas charging and testing.

Charger Functional Characteristics



- M28 x 1.5 female connection with 4 adaptors, that allow different output (M16x2, G3/4", 5/8"-18 UNF, 7/8"-14 UNF)
- Input valve with 2.5 m charging hose (up to 400 Bar) for bottle connection and relative adaptors for 2 types bottle output (W25.4x1/8" and W21.7x1/14")
- Bleed valve for pressure adjustment
- Test coupling valve for gauge connection, with 2 gauges (0-25 Bar and 0-250 Bar) and adaptors
- Additional adaptor for Shrader valve connection Gasket set and 6 mm A/F Allen wrench

See below table for items codification

Item	GPM code
Gasket set	GUAKITAZ
Gauge 0-25 Bar	063.025R
Gauge 0-250 Bar	063.250R
2 Direct gauge connection 1/4" - female M16x2	20140000
Adaptor for bottle connection W25.4x1/8"	25W25414
Adaptor for bottle connection W21.7x1/14"	25W21714
Adaptor for Shrader valve (5/8" - 18 UNF / 8V1)	25AZ588V
Charger	CARKITAZ
6 mm A/F Allen wrench	BRUCH6
Adaptor M28x1.5 - M16x2	25AZ2816
Adaptor M28x1.5 - G3/4"	25AZ2834
Adaptor M28x1.5 - 5/8"-18 UNF	25AZ2858
Adaptor M28x1.5 - 7/8"-14 UNF	25AZ2878
2.5 m flexible hose (400 bar max working pressure)	RD63814038140L2500

